
80 PLUS Verification and Testing Report


TYPICAL EFFICIENCY (50% Load):	86.83%
AVERAGE EFFICIENCY:	82.13%
80 PLUS COMPLIANT:	Bronze



Rated Specifications	Value	Units	
Input Voltage	115/230	Volts	
Input Current	8.5	Amps	
Input Frequency	47-63	Hz	
Rated Output Power	750	Watts	


Note: All measurements were taken with input voltage at 115 V nominal at 60 Hz.

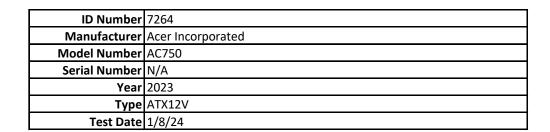


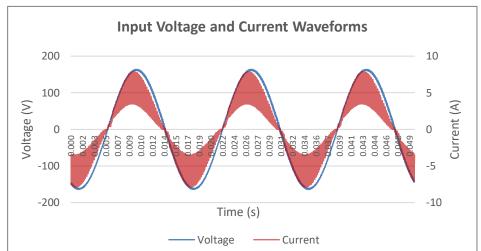

Input AC Current Waveform (ITHD = 7.09%, 50% Load)

I _{RMS (A)}	PF	I _{THD (%)}	Load	Input	DC Terminal Voltage (V)/ DC Load Current (A)			Output	Efficiency		
				Watts	12V (cumulative of 12V1, 12V2, etc.)	-12V	3.3V	5V	5Vstb	Watts	Efficiency
0.135	0.4416	34.33	0%	6.84	No-Load No-Load						
0.698	0.6494	21.81	5%	52.12	12.2/2.78	12.05/0.013	3.42/0.43	5.18/0.43	5.22/0.09	38.21	73.32%
1.065	0.7651	32.37	10%	93.71	12.19/5.55	12.05/0.027	3.41/0.86	5.17/0.86	5.2/0.179	76.37	81.50%
1.761	0.8820	14.41	20%	178.56	12.18/11.11	12.06/0.054	3.4/1.73	5.15/1.73	5.17/0.358	152.50	85.40%
3.977	0.9547	7.09	50%	436.61	12.12/27.76	12.09/0.134	3.35/4.32	5.09/4.32	5.09/0.895	379.09	86.83%
8.113	0.9614	5.80	100%	896.67	12.01/55.52	12.16/0.269	3.26/8.63	4.95/8.63	4.92/1.791	749.80	83.62%

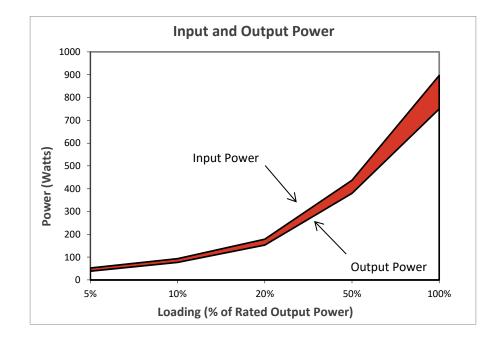

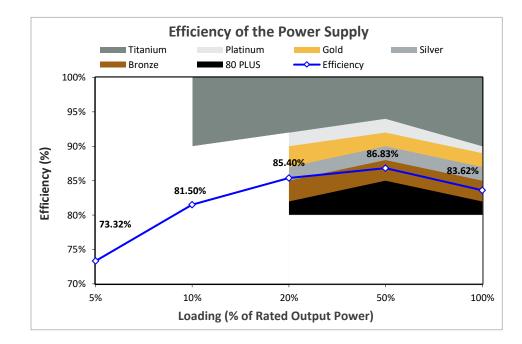



These tests were conducted by a third party independent testing firm on behalf of the 80 PLUS Program. 80 PLUS is a certification program to promote highly-efficient power supplies (greater than 80% efficiency in the active mode) in technology applications. http://www.80plus.org/